


GF filter cartridge housings are a proven design suited for commercial and industrial applications. Available in all 304 SS and Brass head with 304 SS sump. GF housings accept double open end style cartridges with machined knife edge seal surfaces for a no bypass seal. All sump seals are spring loaded allowing a variety of cartridge lengths.

Maximum Operating Parameters

Maximum Pressure: 300 PSI

Maximum Operating Temperature 200°F

Standard Housing Dimensions

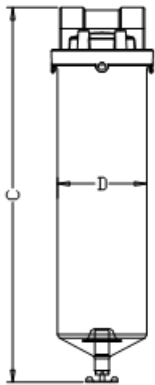

Model	Cartridge Length	C	D	Conn. NPTF
GFS4	3.75"	7.48"	3.5"	0.5"
GFB5	4.75"	8.27"	3.5"	0.5"
GFS10	10"	13.19"	3.5"	0.75"
GFS20	20"	23.19"	3.5"	0.75"
GFS30	30"	33.19"	3.5"	1"
GFS40	40"	43.19"	3.5"	1"



Ordering Information

Example: GFS4-1/2" (304SS, Accepts 3-3/4" Lg. Cartridges, 1/2" NPTF Inlet/Outlet Connections)

Model	Material	Length	Connection Size
GF	B = Brass Head / 304 SS Sump * S = 304 Stainless Steel	4 = 3.75" Lg.	1/2"
		5 = 4.75" Lg.	3/4"
		10 = 10" Lg.	1"
		20 = 20" Lg.	
		30 = 30" Lg.	
		40 = 40" Lg.	
	* GFB5 only		

Notes: EPDM Seals standard. All models come complete with a mounting bracket and wrench.